StageSight: A River Camera That Checks Its Gauge

OpenCV 5 reads USGS staff plates; Claude on AWS decides which instrument to trust

Muhammad Waqar Saleem
Department of Civil and Environmental Engineering, University of Missouri, Columbia, MO, USA
msx9t@missouri.edu ORCID 0009-0004-4976-6979
OpenCV AI Competition 2026, powered by AWS

***Abstract*—A river gauge reports stage from a single pressure sensor. When that sensor drifts, freezes or goes silent, often during the very flood it is meant to record, the record shows no sign of it. Many USGS gauges already carry a camera aimed at a staff plate, but its images are inspected by people, not measured. StageSight turns that camera into an independent second instrument. Classical OpenCV 5 operations and the OpenCV DNN text recognizer read the stage from the plate's printed marks and numbers, *without any gauge data*. On the 29 July 2026 flood at Hancock, NY (USGS 01421500; NWS minor flood, 18.08 ft peak), the camera agrees with the USGS gauge to 0.26 ft RMSE (95% bootstrap interval 0.20–0.31 ft; 29 of 30 readings within 0.5 ft), whereas a regression trained on normal flows has 6.3 ft RMSE. An event-gated agent (Claude on Amazon Bedrock) compares camera and gauge, gathers evidence with tools, and queues sensor flags and flood alerts for human approval. In three replays of each injected fault, Claude Opus 4.6 caught all four gauge faults and blamed the camera in both camera-fault cases in every run, where a rule baseline blamed the healthy gauge; Claude Sonnet 4.6 missed a slow gauge drift in two of three runs. The system runs live on AWS Lambda (Graviton), EventBridge, S3 and Bedrock, and unchanged on a laptop CPU.**

I. Introduction

Stage, the water level at a gauge, drives flood forecasts, warnings and discharge records. A gauge measures it with one sensor, here a pressure transducer, and that sensor fails in quiet ways: it fouls with sediment, its line freezes, its telemetry drops out. Hydrographers find these faults later, during record review; forecasters and emergency managers may act on the bad value in real time.

The USGS operates cameras at many of its gauges and serves their images through the NIMS API [1]. Published camera methods measure stage from such images with deep segmentation and photogrammetry [2], [3], learned regression [4], [5], or purpose-built staff-gauge and stage-camera systems [6], [7]. They need surveyed control points, dedicated cameras, or training labels from the very gauge one would want to check. None uses the camera to *audit* the gauge.

Contributions.

1) A gauge-free reader for existing staff-plate cameras: the plate's own marks give a 1-D projective pixel-to-feet map, the printed foot numbers (read with `cv.dnn.TextRecognitionModel`) give the datum, and per-mark color contrast gives the waterline. It reads a flood above every frame used in setup at 0.26 ft RMSE, and it returns a status instead of a guess when it cannot see.
2) An event-gated agent that arbitrates between two instruments: code detects disagreement, silence, blindness and flood levels; only then does Claude gather evidence (earlier frames, gauge history, an upstream gauge) and act. A rule planner with the same tools is the baseline.
3) A safe operating design, deployed serverless on AWS Graviton: agent memory, a safety net that always surfaces flood alerts, a rule fallback and a human approval queue, evaluated with repeated replays of injected gauge and camera faults on a real flood, failures included.

II. Related Work

Eltner et al. [2] segment water with a CNN and intersect the waterline with a photogrammetric 3-D model; Blanch et al. [3] operate the same family for years at dedicated stations with surveyed ground control. Vandaele et al. [4] transfer-learn water segmentation on public river cameras but stop at segmentation. Xu and Wang [5] assess deep networks that regress gauge height from webcam images; such models learn from the gauge record and are bounded by its range. Staff-gauge vision systems [6] and low-cost stage cameras [7] read water level at sites built for the purpose. StageSight reads an absolute stage from the plate of an existing public camera, needs neither survey nor training labels, and is designed to disagree with the gauge when the gauge is wrong.

III. Data

Camera. The NIMS "Hancock Staff" camera at USGS 01421500, 1080×1920 frames, one per hour, 21 July to 19 October 2026 (1,869 frames). The camera started on 14 April 2026; the 29 July event is its only flood. **Gauge.** USGS gage height (parameter 00065, 15-min), used only to evaluate the reader and, by the agent, as the instrument under test. **Upstream.** USGS 01417500 at Harvard, NY (an agent tool; cross-correlation over 90 days gives a lag of about 3 h). **Flood levels.** NWS NWPS, HKCN6: action 14 ft, minor flood 18 ft. All data are public.

IV. Reading the Plate with OpenCV 5

A. Setup, once per camera

Plate and marks. Red pixels are found by an HSV threshold and a 3×3 opening; `cv.fitLine` with a Huber loss gives the plate axis $\mathbf{d}$ through origin $\mathbf{o}$. Each connected red component is a mark. The long foot marks (area $\geq 0.6\times$ the median of the eight largest) are projected onto the axis, $t_i = (\mathbf{c}_i - \mathbf{o})^\top \mathbf{d}$;

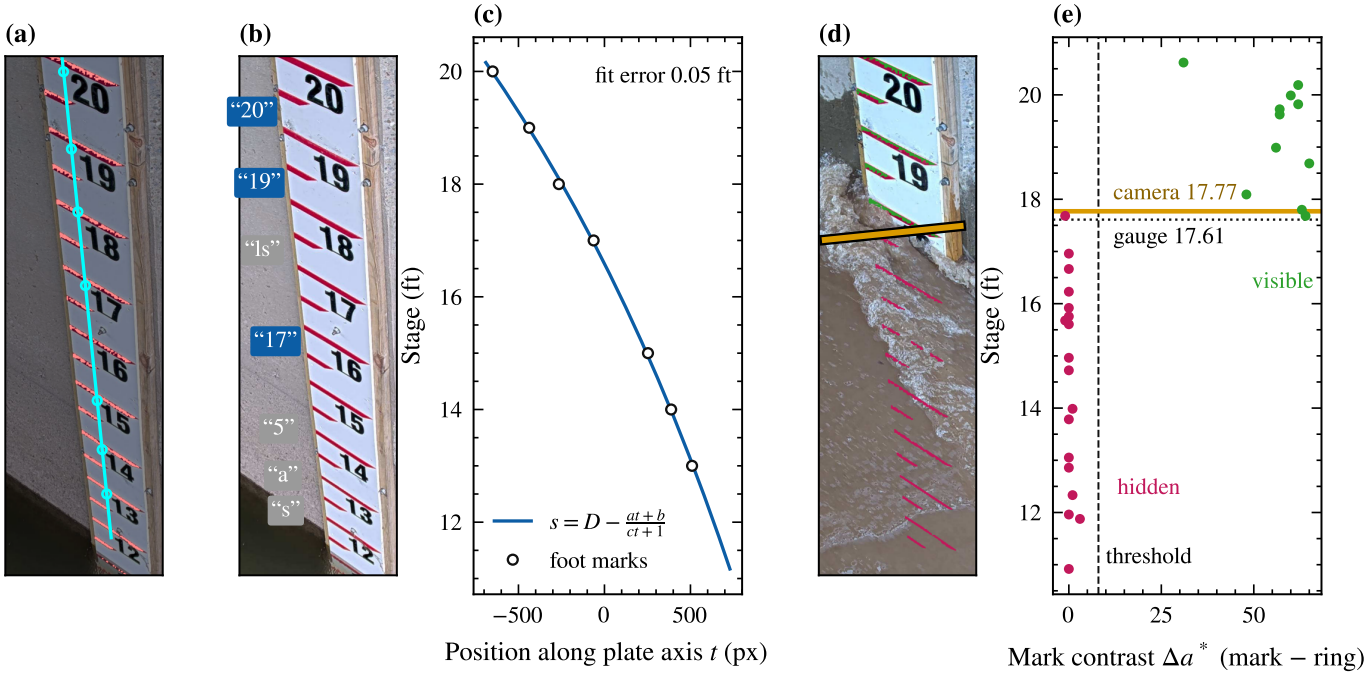


Fig. 1. The reader on real frames. Setup on the reference frame, no gauge data: (a) HSV red mask and robust plate axis (`cv.fitLine`, Huber) through the foot-mark centroids (`cv.connectedComponentsWithStats`); (b) CRNN text recognition of the printed numbers; two-digit reads (blue) vote for the datum, shorter misreads (grey) cannot; (c) the 1-D projective map from the foot marks, Eq. (1). Every frame, here near the second flood peak (29 July, 16:00 UTC): (d) marks still visible (green) and hidden under water (magenta), waterline in yellow; (e) the contrast of each mark against its surround, Eq. (2), on the stage axis: visible marks lie far above the threshold, submerged marks at zero.

a gap of about twice the local spacing is indexed as a missing mark.

Scale. A pinhole camera maps points on a straight plate to the image line by a 1-D homography, so plate units u (ft below the top foot mark) follow

$$u(t) = \frac{a\,t + b}{c\,t + 1}, \qquad \begin{bmatrix} t_i & 1 & -t_i u_i \end{bmatrix} \begin{bmatrix} a \\ b \\ c \end{bmatrix} = u_i, \tag{1}$$

solved by linear least squares over the foot marks (fit error 0.05 ft). Three parameters fixed by geometry extrapolate along the plate where a free polynomial would not.

Datum. The plate is rotated upright (`cv.warpAffine`), red is whitened, and the black digits beside each foot mark are cropped. The OpenCV Zoo CRNN [8], [9] runs through `cv.dnn.TextRecognitionModel` with CTC greedy decoding. In a frame, each read k at mark i proposes the datum $D = k + u_i$; a dropped leading "1" is the usual misread, so only the longest reads may vote. Across setup frames the majority wins: $D = 20$ ft in 6 of 7 frames. Stage is then $s = D - u$.

B. Every frame

Quality gate. Frames that are blurred (variance of the Laplacian below 40), dark or over-exposed are `rejected`; frames of another size are `wrong_size`. **Registration.** The camera moves a few pixels between days. `cv.phaseCorrelate` on the always-dry top of the plate (Hann-windowed) gives the shift; above 80 px the status is `camera_moved`. **Mark visibility.** For each of the $n = 29$ red components (foot and half-foot marks and their fragments), the median Lab a^* inside it is compared with a ring of non-red pixels around it (`cv.dilate`, 15×15 minus 5×5):

$$v_j = \mathbf{1}\left[\mathrm{med}_{\mathrm{mark}\ j}\, a^* - \mathrm{med}_{\mathrm{ring}\ j}\, a^* \geq 8\right]. \tag{2}$$

The test is relative, so it holds in sun, shade and overcast; water and foam over a mark remove its contrast. **Waterline.** With marks ordered top to bottom, the split

$$k^\star = \arg\min_k \ \textstyle\sum_{j<k}(1 - v_j) + \sum_{j \geq k} v_j \tag{3}$$

tolerates a few wrong marks (glare, a leaf). The waterline $t^\star$ is the midpoint of the gap between mark $k^\star - 1$ and mark $k^\star$, and $s = D - u(t^\star)$. Consecutive possible waterlines are 0.08–0.79 ft apart, which sets the resolution of one reading. **Status.** $k^\star \geq n - 1$ (all marks visible, or only the lowest hidden, which is ambiguous at low water) gives `below_plate`; $k^\star = 0$ gives `unreadable` (night infrared, fog, spray). The reader never extrapolates below the plate.

V. The Agent

OpenCV runs on every frame; Claude is called only when code raises an event (Table I). The planner receives the event, the open issues and its own recent actions (memory), and runs a manual tool loop with adaptive thinking through the Anthropic Bedrock client. Evidence tools: `reread_earlier_frames` (re-runs the reader, with mark

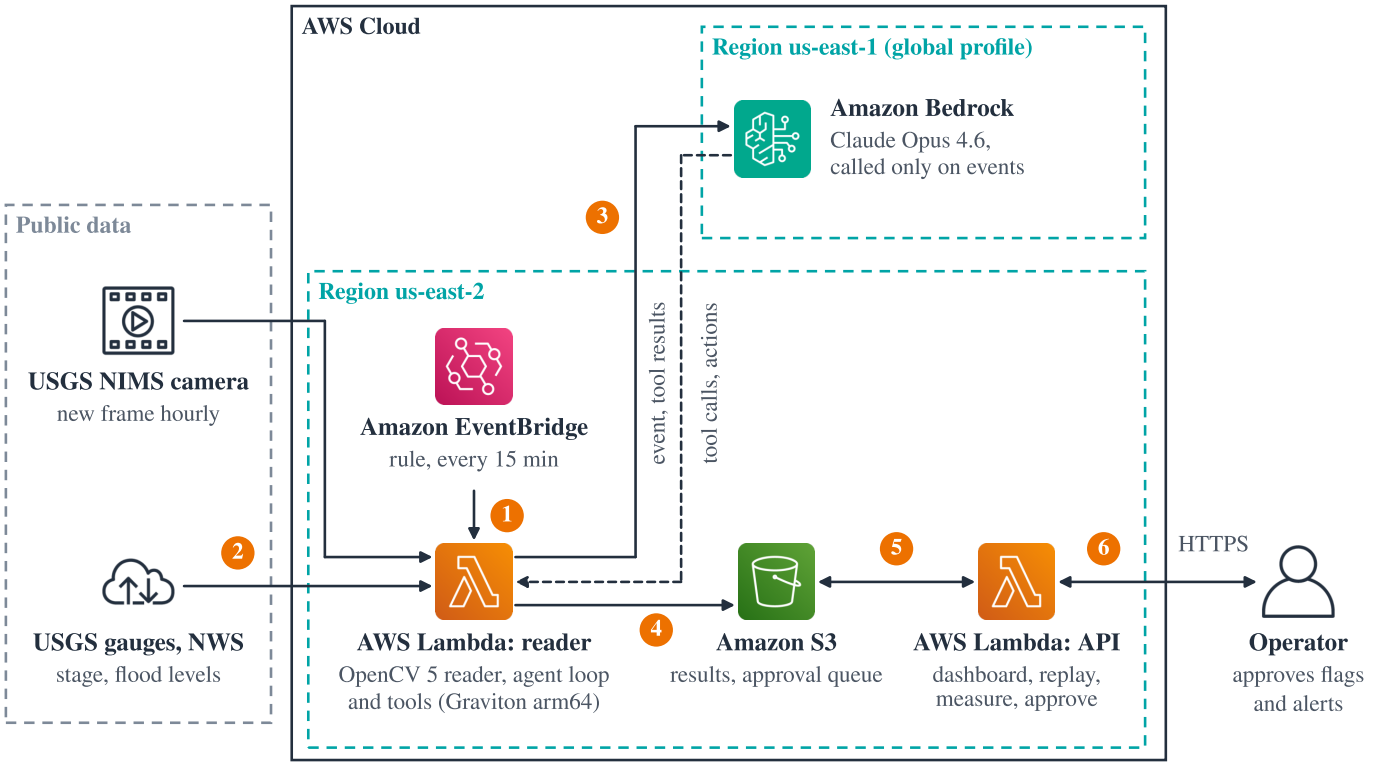


Fig. 2. Deployment. ① An EventBridge rule starts the reader Lambda every 15 min; ② it fetches the newest frame (one per hour, each processed once) and gauge values; ③ on an event it runs the agent loop, in which Claude on Bedrock chooses tools and the Lambda executes them; ④ results and the approval queue go to a private S3 bucket; ⑤–⑥ a second Lambda serves the dashboard, the flood replay and the measure endpoint, and records the operator's decisions.

TABLE I
EVENTS THAT CALL THE AGENT (CHECKED BY CODE ON EVERY FRAME)

Event	Trigger
`disagree`	camera and gauge differ by > 0.5 ft for 2 frames, or the camera is below the plate while the gauge reads > 0.5 ft above it
`gauge_silent`	the camera reads, but the gauge has no value in the last 30 min
`camera_blind`	camera unreadable or moved for 3 frames while the gauge is at or above action stage
`level_rise`	the stage (camera when readable, else gauge) reaches an NWS level

counts), `get_site_gauge`, `get_upstream_gauge`. Final actions: `flag_sensor` and `draft_alert` (both enter the approval queue), `publish_provisional_stage` and `no_action`. Two operator facts are in the prompt: readings move in steps of about 0.5 ft, and upstream changes arrive about 3 h later.

Safety design. (i) *Safety net*: a `level_rise` always yields an alert draft for the operator; if the agent doubted it, its doubt is written into the draft. (ii) *Fallback*: on any API or connection error, a refusal, or no final action, the rule planner decides and the log says so. (iii) *Human in the loop*: no flag or alert leaves the system without an operator's approval.

VI. System on AWS

Both functions run on arm64 (Graviton) from one zip package that bundles the Linux arm64 wheels of `opencv-python-headless` 5.0.0.93 and the flood replay; it is built without Docker and deployed by an idempotent script that creates the bucket, the IAM role, both functions, the schedule and a Function URL (Fig. 2). The role can read and write only the project bucket and invoke Anthropic models on Bedrock. From CloudWatch, a scheduled tick (download, read, event check, write) takes a median of 6.3 s (n = 23, peak memory 295 MB) and an API request a median of 47 ms (n = 1,227). Claude is called only on events: none on a quiet day, two or three during the flood, each with three evidence calls and one or two actions. With Opus 4.6 a replayed flood used about 29k input and 5k output tokens per scenario (median over runs).

VII. Experiments

A. Accuracy on a real flood

Test frames are the daylight frames of 21 July–1 August with the water on the plate (n = 30, 29–31 July). The baselines are trained on the 15 frames of the 4–5 September high water (up to 11.97 ft); 27 of the 30 test frames lie above that range.

As Table II and Fig. 3 show, StageSight is the only gauge-free method and the most accurate. Fitting the offset to the gauge is worse (0.37 ft): the lowest mark is often wet at low

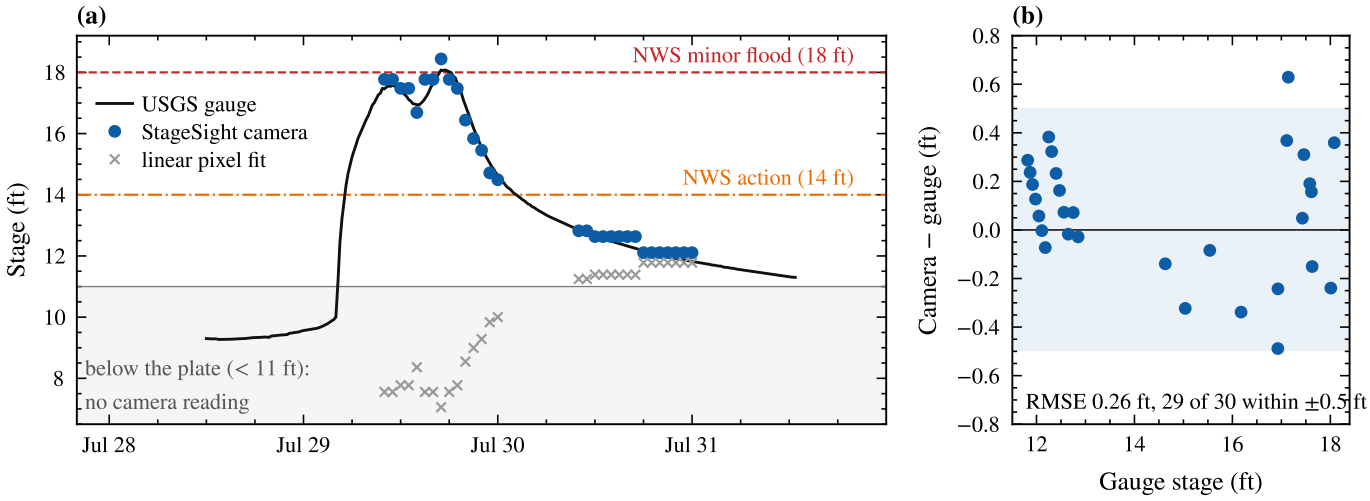


Fig. 3. (a) The camera follows both flood peaks with no gauge data; a linear fit trained on the 4–5 September high water cannot reach flood stage. Gaps in the camera series are nights. Below the plate (shaded) the reader reports `below_plate`. (b) Error against stage; the band is ±0.5 ft. Runs of equal readings near 12–13 ft are the step between two marks.

TABLE II
STAGE ERROR ON THE 29 JULY 2026 FLOOD (n = 30)

Method	Gauge data	RMSE	Bias	≤0.5 ft
StageSight (ours)	none	**0.26**	+0.07	**97%**
Plate + gauge-fitted offset	training	0.37	−0.27	83%
Linear pixel fit	training	6.31	−4.70	23%

Errors in ft. StageSight MAE 0.21 ft, R^2 = 0.99; RMSE 95% bootstrap interval 0.20–0.31 ft.

TABLE III
INJECTED FAULTS ON THE 29 JULY FLOOD: RUNS THAT CAUGHT THE FAULT AND MEDIAN DELAY (RANGE)

Fault	Rules	Opus 4.6	Sonnet 4.6
gauge offset +1 ft	1/1, 1 h	3/3, 1 h	3/3, 1 h
gauge silent 8 h	1/1, 1 h	3/3, 1 h	3/3, 1 h
gauge frozen 10 h	1/1, 4 h	3/3, 2 h	3/3, 2 h
gauge drift to +1.5 ft	1/1, 8 h	3/3, 7 h	1/3, 7 h
debris over plate	0/1	3/3	3/3
spray on lens	0/1	3/3	3/3
flood alert in every scenario	1/1	3/3	3/3
false sensor flags (all runs)	0	0	1

Rules are deterministic (one run); each Claude model ran every scenario 3 times. Delay: hours from the fault start to the gauge flag (silent gauge: to the published camera stage). Camera faults: the camera blamed, the healthy gauge not blamed, the bad camera stage never published.

water, which biases the fit. The linear baseline fails because the flood lies outside its training range. Two flood frames are regression tests in the repository (17.77 vs 17.61 ft; 12.63 vs 12.47 ft). The 30 test frames are hourly and correlated, so the bootstrap interval is optimistic; they come from one flood at one camera.

Ablations. A sub-mark edge search inside the bracket gave 0.275 ft RMSE against 0.257 ft for the midpoint and was not adopted. Using the bracket between two marks as an uncertainty interval covered the gauge in only 23–50% of frames, so we report no intervals.

B. Coverage

Over the 1,863 frames of the 90-day replay the reader gave a number for 45 (2.4%, Fig. 4); the water was below the plate for 65% and 33% were night or obscured. The plate is a flood instrument: it reads when the river is high, which is when a gauge fault matters most.

C. Agent: injected faults on the real flood

The replay feeds the 29 July flood frame by frame and injects four gauge faults and two camera faults; the camera faults are synthetic overlays on real frames, placed by us. A fault counts as caught when the gauge is flagged (or, for a silent gauge, the camera stage is published) within the fault window plus 2 h; a camera fault counts as handled when the camera is blamed and the healthy gauge is not. The rule planner uses the same tools with fixed thresholds. Each Claude model ran every scenario 3 times (Table III).

Opus 4.6 handled every scenario in all three runs, with the same delays each time; it flagged the frozen gauge after 2 h against 4 h for the rules (Fig. 5) and the drift 1 h earlier. Sonnet 4.6 matched it except on the slow drift: in two of three runs it blamed the camera instead of the gauge, and one of those runs also flagged the camera before the fault began. In one Sonnet run Bedrock answered once with `ServiceUnavailable`; the rule planner decided that event, as designed.

Fixed thresholds cannot tell which instrument is wrong: in both camera faults they see a persistent disagreement, blame the gauge and publish the bad camera stage (Fig. 6). Claude checks the evidence and blames the camera (Fig. 7). The rules were not given the mark-count signal Claude used; a rule that blames the camera when visible marks drop while the gauge falls would likely catch these two cases, but not faults it was

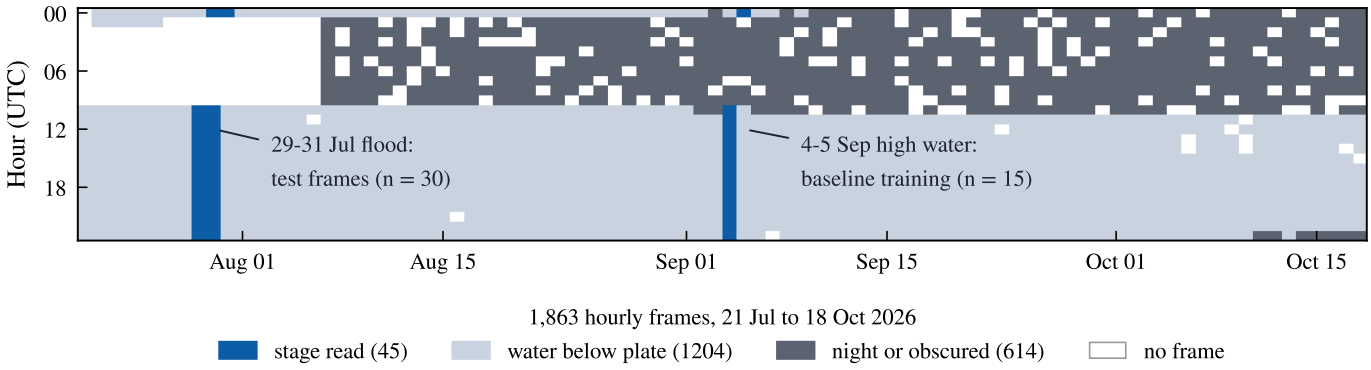


Fig. 4. Reader status for every hourly frame of the 90-day replay (columns: days; rows: hour, UTC). The camera reads during the two high-water periods; otherwise the water is below the plate (light) or it is night (dark).

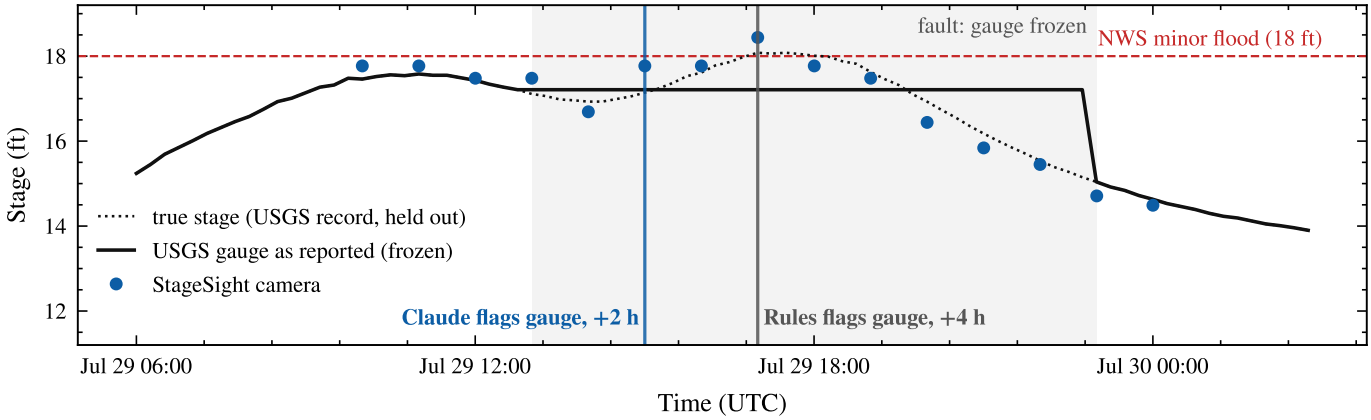


Fig. 5. Frozen-gauge replay (one Opus 4.6 run). The reported gauge stays at 17.21 ft while the river rises to its second peak and falls. Claude flags the gauge 2 h after the fault; the rule baseline flags it after 4 h, once three frames disagree consistently.

not written for.

In 90 days of normal operation (1,863 frames, rule planner) there were no false sensor flags; the two alerts were an action alert and a flood alert, both at the real flood.

D. Development history of the agent

We report every Claude run. *Run 1* (no saved log) missed the drift and blamed the camera; the two operator facts above were added. *Run 2* caught every fault but, in the frozen-gauge case, forgot its own gauge flag and drafted no flood alert during a real flood. The fix was in code, not in the prompt: memory of open issues and the safety net. *Run 3*, the single run shown in Fig. 5: the safety net fired once, again in the frozen-gauge case. Claude flagged the frozen gauge, but partly for a wrong reason: it inferred from the 3 h lag that the river was receding, while this flood peaked about 7 h after the upstream peak. It therefore called a correct 17.77 ft camera reading a spike, and its provisional stages were 0.3–0.45 ft low. We did not re-tune the lag to this flood. The repeated runs in Table III use the code of run 3.

VIII. Limitations and Threats to Validity

One flood, one camera. The accuracy rests on 30 correlated frames of one event, and the agent results on replays of that event; the camera faults are synthetic. **Ground truth.** The USGS gauge is the reference, although it is the instrument the system questions. **Night**: infrared frames show the plate but not the red marks (`unreadable`). **Low water**: below about 11 ft the plate is dry and the camera cannot check the gauge. **Plate designs**: other NIMS plates (Owasco, Moravia, Chenango, NY) use black marks or 0.1 ft text, or stand on dry bank; they are not supported yet. **No plate**: a self-calibrated research mode learns a per-pixel flood-stage map from the archive (0.29 ft MAE in range on the Hancock wall) but does not extrapolate to floods; on far-bank bridge cameras (Hermann, MO; De Soto, KS; 2–3 px per ft) it reaches only 3.4 and 2.3 ft RMSE in range. **Models**: Claude Opus 4.6 and Sonnet 4.6 are the Claude models available on this AWS account; the model is a configuration setting (`AGENT_MODEL`).

IX. Responsible Operation

StageSight is a decision aid, not an official warning system. Nothing is sent without an operator's approval; live approvals require an operator token, and approvals in the public replay change nothing. A camera stage that stands in for the gauge is labeled provisional. The system uses public data and no personal data. The bucket is private, the role is limited as

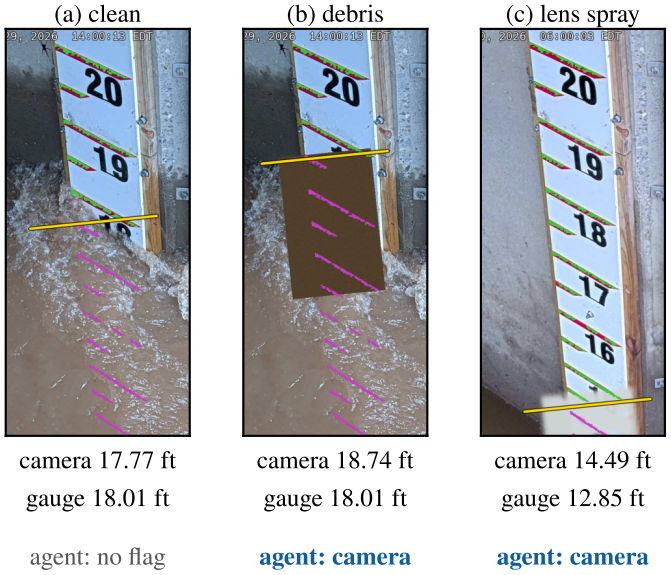


Fig. 6. Simulated camera faults on real frames (29 July 18:00 and 30 July 10:00 UTC) with the reader's output and the agent's verdict. (b) Debris hides the marks from 16.6 to 18.8 ft; (c) spray removes their color. The reader reads too high and the gauge is right.

Claude Opus 4.6, debris case, 29 July 19:00 UTC (verbatim)

Tools: `reread_earlier_frames(n=4)`, `get_site_gauge(12 h)`, `get_upstream_gauge(12 h)`.
flag_sensor(camera), evidence: "Camera reads 18.74 ft vs gauge 17.63 ft (+1.11 ft, >4× RMSE). Visible marks fell from 11 to 7 even as the gauge recedes smoothly from its 18.06 ft peak. Upstream gauge confirms falling trend with appropriate 3-hour lag. [...]"

Fig. 7. An agent decision in the debris case: the evidence Claude gathered and the flag it queued for approval.

above, failed ticks are not retried, and every agent decision, tool call and reason is logged and shown on the dashboard. The public `/measure` endpoint reads uploaded frames of this camera only.

X. Conclusion

A camera that already watches a staff plate can measure stage by geometry and OCR alone, through a flood above everything seen in setup, and that independent reading lets an agent tell which instrument is wrong. Next: read night infrared frames from the printed numbers and support more plate designs across the NIMS network.

Reproducibility. Code, results and figures: https://github.com/Waqar-msx9t/stagesight (Python 3.12, OpenCV 5.0.0.93, NumPy 2.5.4, Anthropic SDK 1.15.0). The tests run offline; the scripts *plate_test*, *replay_agent* and *make_figures* reproduce every number and figure.

References

[1] U.S. Geological Survey, "National Imagery Management System (NIMS) API," https://api.waterdata.usgs.gov/nims/v0, accessed Oct. 2026.

[2] A. Eltner, P. O. Bressan, T. Akiyama, W. N. Gonçalves, and J. Marcato Junior, "Using deep learning for automatic water stage measurements," *Water Resources Research*, 2021, doi:10.1029/2020WR027608.

[3] X. Blanch, J. Grundmann, R. Hedel, and A. Eltner, "AI image-based method for a robust automatic real-time water level monitoring: a long-term application case," *Hydrology and Earth System Sciences*, vol. 30, p. 797, 2026, doi:10.5194/hess-30-797-2026.

[4] R. Vandaele, S. L. Dance, and V. Ojha, "Deep learning for automated river-level monitoring through river-camera images: an approach based on water segmentation and transfer learning," *Hydrology and Earth System Sciences*, vol. 25, p. 4435, 2021, doi:10.5194/hess-25-4435-2021.

[5] R. Xu and B. Wang, "Assessing deep learning techniques for remote gauging and water quality monitoring using webcam images," *Hydrology*, vol. 12, no. 4, p. 65, 2025, doi:10.3390/hydrology12040065.

[6] L. Sabbatini, L. Palma, A. Belli, F. Sini, and P. Pierleoni, "A computer vision system for staff gauge in river flood monitoring," *Inventions*, vol. 6, no. 4, p. 79, 2021, doi:10.3390/inventions6040079.

[7] S. Noto, F. Tauro, A. Petroselli, C. Apollonio, G. Botter, and S. Grimaldi, "Low-cost stage-camera system for continuous water-level monitoring in ephemeral streams," *Hydrological Sciences Journal*, 2022, doi:10.1080/02626667.2022.2079415.

[8] B. Shi, X. Bai, and C. Yao, "An end-to-end trainable neural network for image-based sequence recognition and its application to scene text recognition," arXiv:1507.05717, 2015.

[9] OpenCV, "OpenCV Zoo: text recognition CRNN (text_recognition_CRNN_EN_2021sep)," https://github.com/opencv/opencv_zoo.